LINKAN

PROTECTIVE FILMS



Linkan UK & Ireland Ltd

483 Green Lanes London N13 4BS UNITED KINGDOM Tel: +44 7853459962

Email: info-lkl@linkan-group.com



Linkan North America, LLC

Woolworth Building
233 Broadway
Suite 2200
New York, NY 10279
Tel: +1 212 608 6500
Email: info-lkn@linkan-group.com



Linkan Panama, S.A

Plaza Beverly.
Calle 4 Rio Abajo.
Local #13.

Tel: 2217699/2249962

Email: info-lkp@linkan-group.com



Linkan Zhuhai Ltd

Building 31-7, A2 Doorway Business Park, No. 29 Xianggong Road, Hongwan, Xiangzhou, Zhuhai, Guangdong 519000, China Tel: +86 756 2170771 Fax: +86 756 2170772 Email: info@linkan-group.com

Linkan Ltd

4th Floor, Hong Kong Trade Centre 161 Des Voeux Road, SAR of Hong Kong, China


Tel: +852 8114 2684 Fax: +852 3159 8467

Email: info@linkan-group.com





www.linkan-group.com

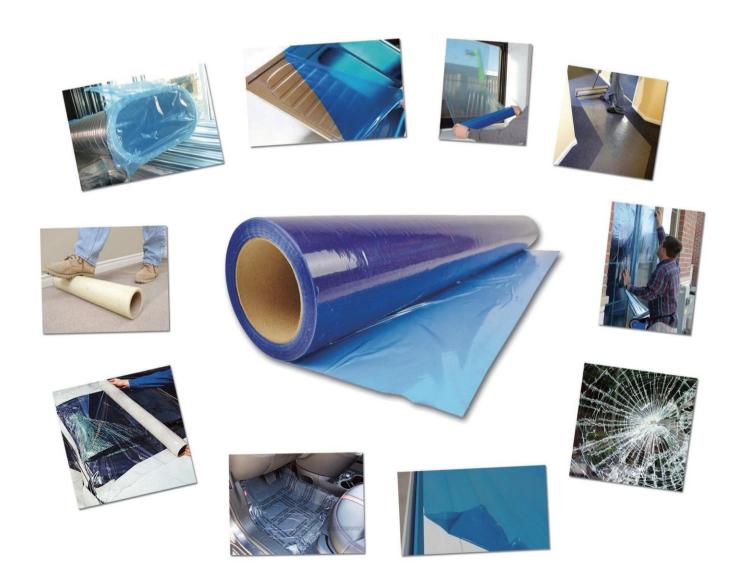

Our Factory

Our factory is one of the largest factories in the North of China that produces protective films. Their technicians have more than 20 years experience in producing protective films for various industries, specializing in the research, development and production of high quality protective film.

The factory covers an area of 5000 square meters, and has more than 100 employees, including an R&D group formed by several senior engineers who have more than 20 years of experience in the protective films industries.

They currently have 7 production lines including blow machines, coating machines, cutting machines, printing machines, etc. with a production capacity of 80-100 containers every month.













Carpet Protection

Temporarily protect your carpet with this self-wound plastic film from dirt or damage during construction, remodeling or painting. This carpet film has super high adhesion so it remains stable on the carpet. It is easy to remove, leaving no residue. Can be produced puncture resistant on request.

Normal Thickness: 50 microns, 70 microns, 90 microns

Roll size: 600mmxl00m, 1000mmxl00m







Product Code: LK-CP-1001

Multi Surface Protection

Multi Surface Protection Film is a tough, durable film with acrylic adhesive which is great for protecting hard floors, counter tops, tile, marble and more. Can produce with sticky side in or out as per request. It is convenient and economical to use, also can be removed without any residue.

Normal Thickness: 50 microns, 70 microns, 90 microns

Roll size: 600mmxl00m , 1000mmxl00m







Product Code: LK-MSP-1002

LINKAN Source with Sose & Confidence!

Window Glass Protection

Protect window glass and panels during construction, installation, painting, stucco application and so on with self-adhesive window glass protection film. The window glass film can be UV proofed for up to 30 days.

Normal Thickness: 38 microns, 50 microns, 70 microns

Product Code: LK-WGP-1003 Roll size: 600mmx50m, 533mmx60m







Auto Carpet Protection

Auto Carpet Protection Film is a multi-layer heavy duty polyethylene film that is easy to apply and remove printed with DEALER MUST REMOVE and perforated. The perforation allows it to be torn off by hand to produce square sizes more suitable for vehicles. Protects vehicles from unwanted mud, dust, paint etc.

Normal Thickness: 75 microns, 100 microns

Product Code: LK-ACP-1004 **Roll size:** 609mmx60m, 533mmx60m, 609mmx152m







HVAC Duct Protection

HVAC Duct protection film is a self-adhesive, high puncture resistance plastic film, which can be used on open duct during construction to temporarily protect any open ducting. With this film there is no need to use tape or strapping to secure and can be easily removed without leaving any residue. Normal

Normal Thickness: 40 microns, 50 microns, 75 microns

Product Code: LK-HDP-1005 **Roll size:** 609mmx60m , 533mmx60m , 609mmx152m







Collision Wrap

Collision Wrap Film is an easy and cost effective way to prevent any loose items such as parts or glass coming away from damaged vehicles. It can also protect the interior of your vehicles from being damaged from water or dirt.

Normal Thickness: 75 microns, 100 microns Roll size: 914mmx30m, 914mmx60m







Product Code: LK-CW-1006


3


Mirror Safety Backing – CATI (PE material)

Mirror Safety Backing Film-CAT 1 is a plain polyethylene film with high adhesion designed for mirrors to keep fragments together and reduce the risks of injury when mirrors are broken accidentally. Through high adhesion, the high performance pressure-sensitive acrylic adhesive make it easy to unwind and tight bond to the mirror. It meets the requirements for ANSI Z97.1-1984 and AS/NZS 2208:1996.

Thickness: 130microns, 150microns

Roll size: 369mmx200m , 629mmx200m , 1219mmx200m **Product Code:** LK-MSB-PE-1007







Product Code: LK-MSB-WOV-1009

Mirror Safety Backing - CATII (PE woven material)

CATII mirror safety film is also shatter-sealed for mirrors to avoid human injury when mirrors are broken. But it is manufactured with a high tensile and impact woven polyethylene film with high performance acrylic adhesive. It is primarily recommended for mirrored wardrobe doors that require a Category II Mirror Safety Backing. Pass test as per ANSI Z97.1-1984

5

Thickness: 150 microns

Roll size: 369mmx200m, 629mmx200m, 1219mmx200m





Mirror Safety Backing (PET material)

This film is constructed from high quality polyester (PET) based films, functional nano-coatings and paired with permanent acrylic adhesives to provide outstanding optical clarity. These films are barely visible when applied but they provide functional features, designed to make glass and mirrors safer, both by strengthening it against breakage and helping hold dangerous shards of shattered glass together in situations where breakage does occur.

Thickness: 70 microns, 100 microns, 200 microns

Product Code: LK-MSB-PET-1008





PET Material Protection

Optical grade protective film, uses environmentally friendly material PET as the substrate, coated with a special acrylic adhesive, so that it has a low but long term adhesion. It is easily removable, leaving no residue. It has high light transmission, high environmental resistance and is anti-static. Applications include flat panel displays, flat product surface protection, photo electrics, LCD monitors, touch screens, tablet PCs, cell phones, PDAs, and more.

Thickness: 50 microns, 75 microns, 100 microns

Product Code: LK-MP-1010






Painted Metal Protection

Protection of painted metal surfaces is important during stamping and shearing operations, as well as during transit and installation.

To help prevent surface damage to painted metal, our films can be applied to the metal coil after sheeting, prior to the metals being formed. It helps prevent dents, scratches and damage during shipping and processing.

Thickness: 50 microns

Roll size: 1200mmx500m, 1200mmxl000m Product Code: LK-PMP-1011







Stainless Steel Protection

We can offer a wide range of protective films for stainless steel, developed to preserve any type of surface finish, including: 2B, Scotch Brite, BA "Bright Annealed" or 3D.

Normal thickness: 50 microns, 70microns

Roll size: 1200mmx500m Product Code: LK-SSP-1013








Self Adesive PE Protective Film

Self-adhesive PE protective film is specially designed for various product surfaces to provide temporary protection during the process of fabrication, production, transportation, storage. This self-adhesive PE protective film is easy to remove and won't leave residue.

Thickness: 35 microns, 50 microns, 70 microns Roll size: 1000mmx200m, 1200mmx200m

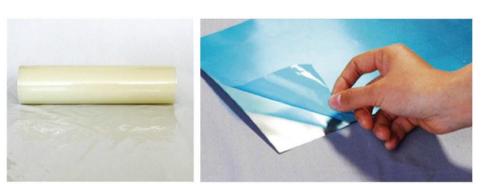



Product Code: LK-SAPF-1012

PVC Plastic / Aluminium Extrusion Profile Protection

Our aluminium extrusion profile protection film offers stable adhesion strength, which is easy to use and leaves no adhesive residue behind after removal. It is mainly used for surface protection of aluminium alloy profiles, heat tinting sections, oxidation polishing sections, plastic profiles, plastic or steel door and window profiles, which can effectively prevent scratches and damage during transportation, storage and installation.

Normal Thickness: 60microns, 70microns
Colour: clear, blue, black and white








Product Code: LK-APP-1014


8


Aluminium Composite Panel Protection

This film is used by the aluminium and plastic panel industry. It is a layer of plastic film attached to the surface of the panel. The purpose is to protect the produced panel from damage during handling, transportation and installation. Therefore the surface of the panel is as clean as new. Available printed.

Thickness: 60microns, 70microns, 80microns Product Code: LK-ACP-1015 **Printability:** 1-3 colours with customized logo







Application Tape/Transfer Tape

Application tape is also called transfer tape. It has a high tack formulation which allows vinyl letters and graphics to release easy and clean with no tearing, wrinkles, or glue strings. It is suitable for all sizes of letters and logos, easy peel, as well as matte and calendared vinyl. It offers extreme value for a perfect tear free, high quality transfer.

Colour: Clear or White Product Code: LK-TT-1016









Stucco Masking Tape

Stucco Masking Tape is a UV resistant polyethylene tape used to temporarily mask surfaces during stucco application and painting. These tapes are often applied directly to window and door frames and sometimes used in conjunction with short term window protection films for added masking protection. It has a special synthetic high-tack adhesive which provides a watertight seal in severe environments and weather conditions and offers clean removal.

Roll Size: 51mmx55m

Colour: Red

UV Resistance: 30, 90 or 234 days







Product Code: LK-SMT-1017

Clean Room Sticky Mats

Sticky mats are excellent in areas where high cleanliness is required. Especially in cleanrooms, manufacturing plants, hospitals, pharmaceutical production facilities and is highly effective in dustremoval.

Standard dimensions: 18 x 36, 18 x 45, 24 x 36, 24 x 45

36 x 36, 36 x 45 and 36 x 60 inches









Product Code: LK-CRS-1018